



Mobile Network Camera

Installation Guide

Legal Information

©2022 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

About this Manual

The Manual includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of this Manual at the Hikvision website (<https://www.hikvision.com/>).

Please use this Manual with the guidance and assistance of professionals trained in supporting the Product.

Trademarks

HIKVISION and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned are the properties of their respective owners.

Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS MANUAL AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATTER PREVAILS.

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Compliance

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU.



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info

Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (A)/NMB-3(A) standards requirements.

Applicable Models

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
 Note	Provides additional information to emphasize or supplement important points of the main text.
 Caution	Indicates a potentially hazardous situation, which if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
 Danger	Indicates a hazard with a high level of risk, which if not avoided, will result in death or serious injury.

Safety Instructions

- Proper configuration of all passwords and other security settings is the responsibility of the installer and/or end-user.
- In the use of the product, you must be in strict compliance with the electrical safety Input voltage should meet limited power source or PS2 requirements regulations of the nation and region. Please refer to technical specifications for detailed information.
- Input voltage should meet limited power source or PS2 requirements according to the IEC60950-1 or IEC 62368-1 standard. Please refer to technical specifications for detailed information.
- Do not connect several devices to one power adapter as adapter overload may cause over-heating or a fire hazard.
- Please make sure that the plug is firmly connected to the power socket.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cable, and then please contact the service center.

TABLE OF CONTENTS

Chapter 1 Packing List and Cable Description	1
1.1 Packing List.....	1
1.2 Cable Description	3
Chapter 2 Installation	4
2.1 Installation Requirements.....	4
2.1.1 Installation Position Requirements.....	4
2.1.2 Installation Surface Requirements.....	4
2.1.3 Water Proof Requirements	4
2.2 Vertical Installation	4
2.2.1 Vertical Installation Method 1	4
2.2.2 Vertical Installation Method 2	7
2.3 Horizontal Installation.....	11
Chapter 3 Angle Adjustment.....	15
3.1 Adjust With Wrench	15
3.2 Adjust the Body of the Camera	16

Chapter 1 Packing List and Cable Description

Before You Begin

Before unboxing, check if the package is intact. Refer to the list to make sure that all the assembly parts are included. The 3 types of packing lists of the mobile network camera is shown below.

1.1 Packing List

There are 3 type of cable available, differing on their support for power, alarm and internet interface. Please choose according to your actual need.

Table 1-1 Packing List of Type I Camera

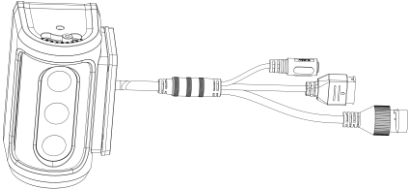


No	Picture	Name	Number
1		Camera	1
2		Wrench	1
3		ST4.8×25 Screws	1
4		QSG	1
5		Tape	3
6		Water Proof Suit (Only Available for RJ45 Cable)	1

Table 1-2 Packing List of Type II Camera





No	Picture	Name	Number
1		Camera	1
2		Wrench	1
3		ST4.8×25 Screws	1
4		QSG	1
5		Tape	3

Table 1-3 Packing List of Type III Camera

No	Picture	Name	Number
1		Camera	1
2		Wrench	1
3		ST4.8×25 Screws	1

4		QSG	1
5		Tape	3

1.2 Cable Description

There are 3 types of cables for the network camera, as shown in the following figures. Please refer to the relevant instructions according to the physical equipment.

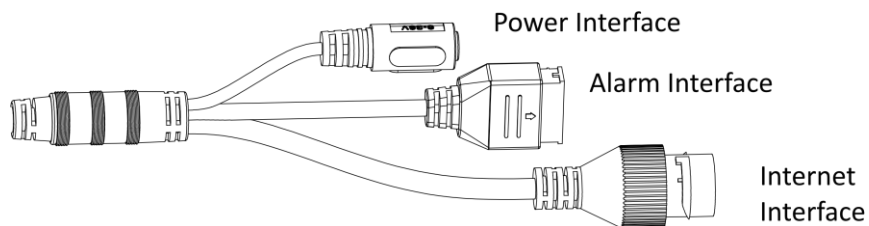


Figure 1-1 RJ45 Cable

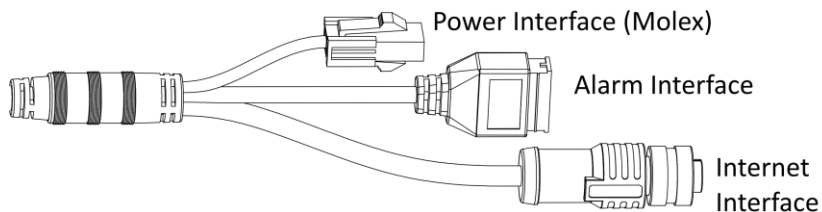


Figure 1-2 4 Core Cable

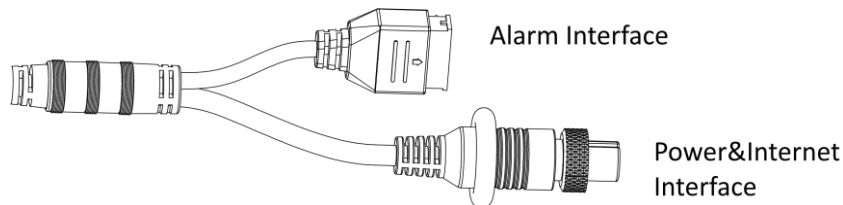


Figure 1-3 6 Core Cable

- Power Interface: the camera supports 9V-36V power supply. Please connect the positive and negative poles of the power supply correctly.
- Internet Interface: network signal output.
- Alarm Interface: support alarm input and output.

Chapter 2 Installation

2.1 Installation Requirements

2.1.1 Installation Position Requirements

Before you begin

Puncture a hole on the body of the vehicle for the cable of the camera to go through. Match the sheet metal fixed support with the hole when installing the camera.

The camera can be installed both horizontally and vertically, though the later is preferred. Typically, horizontal installation is recommended for the police vehicle, and the vertical installation is recommended for school bus and ambulance.

To install the camera vertically, two requirements should be met for the best capture performance and the ease of installation:

- The height of installation should be between 1-1.6 m
- The surface of installation should be vertical to the ground.

When both requirements can be met, refer to 2.2.1 Vertical Installation Method 1. If not and camera is to be installed on a tilted surface, refer to 2.2.2 Vertical Installation Method 2. On the tilted surface, the camera requires further calibration of its angle.

2.1.2 Installation Surface Requirements

For the stability of the camera, two further requirements of the material of the surface of the installation should be met:

- When the camera is installed on the sheet metal, its thickness should be more than 1.2 mm. If the thickness is below this number, it is recommended to strengthen the sheet metal with a reinforcing plate.
- When the camera is installed on a plastic surface, it is recommended to strengthen the surface with a reinforcing plate.

2.1.3 Water Proof Requirements

The throwing line of the camera should not be exposed outside of the vehicle. It is recommended to get the cable connection part water-proof treatment.

2.2 Vertical Installation

Since the installation process of cameras with differing cables are the same, we take one type to illustrate the installation process.

2.2.1 Vertical Installation Method 1

Step 1 Use the hexagon wrench in the package to unfasten the two the screws at the back of the camera.

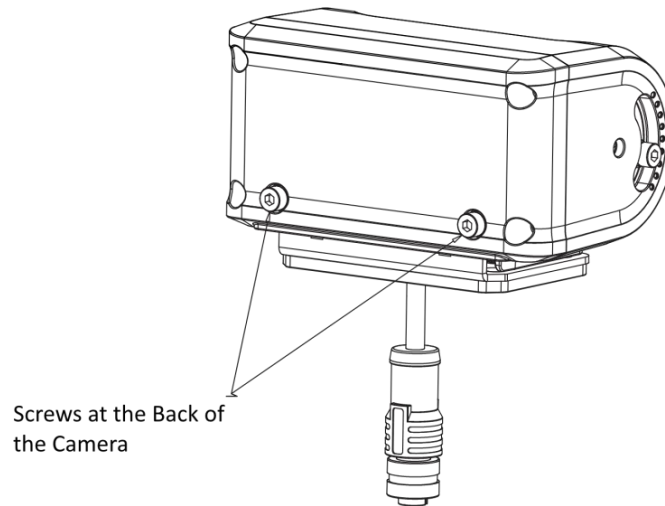


Figure 2-1 Unfasten the Screws

Step 2 Take off the sheet metal from the camera, and the rubber seal of the cable from the sheet metal.

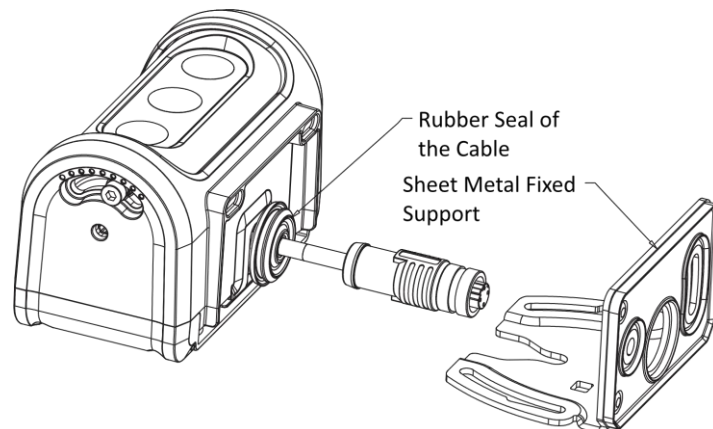


Figure 2-2 Take Off the Sheet Metal and Rubber Seal

Step 3 Vertically place the sheet metal fixed support on the place where the camera is to be installed, and then fix it with the screw.

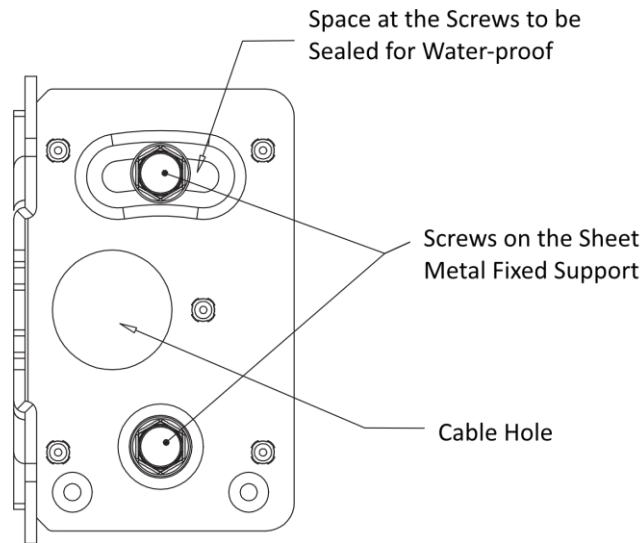


Figure 2-3 Fix the Sheet Metal Fixed Support

Step 4 Guide the cable through the cable hole, seal the hole with the rubber seal, and install the camera back to the sheet metal fixed support.

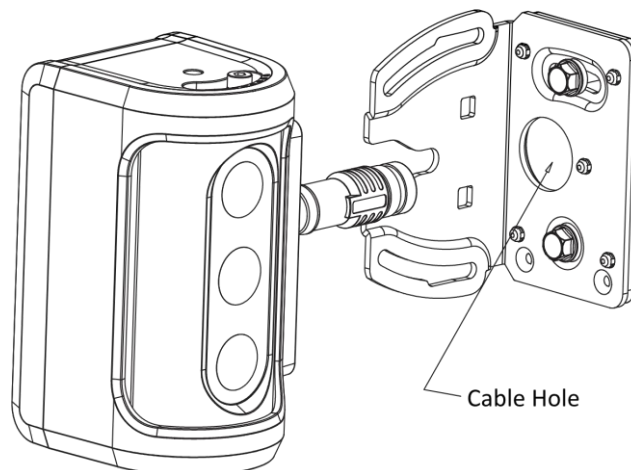


Figure 2-4 Reinstall the Camera to the Fixed Support

Step 5 Tighten the two screw on the back of the camera.

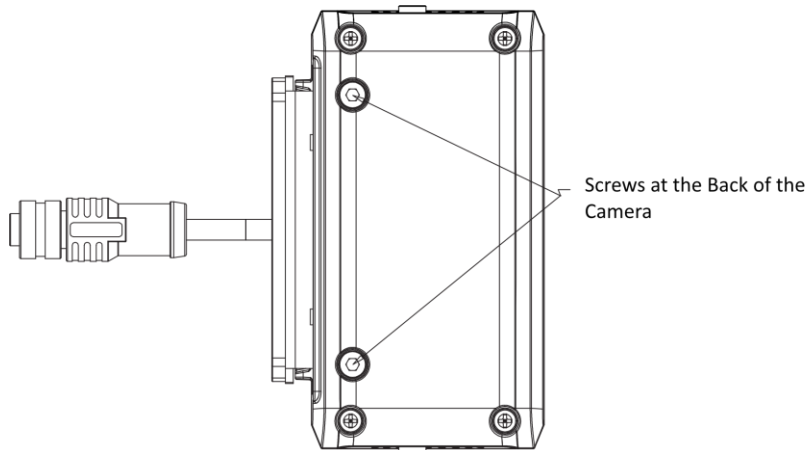


Figure 2-5 Tighten the Screws

Step 6 Loosen the screw on the two sides of the camera with the hexagon wrench, adjust the angle of the camera for the best vision and tighten the two fixation screws to avoid wobble.

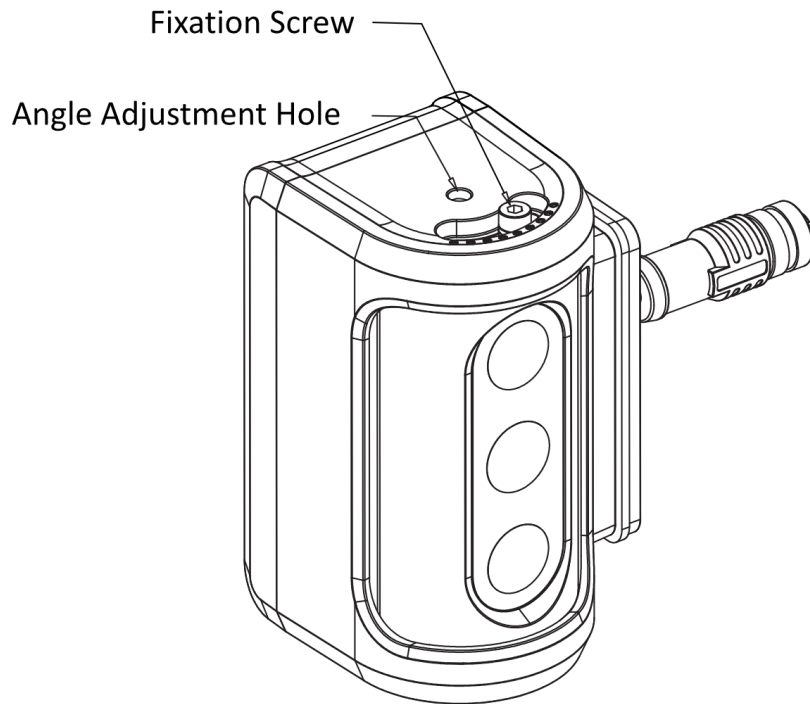


Figure 2-6 Adjust the Angle of the Camera

2.2.2 Vertical Installation Method 2

Step 1 Use the hexagon wrench in the package to unfasten the two screws at the back of the camera.

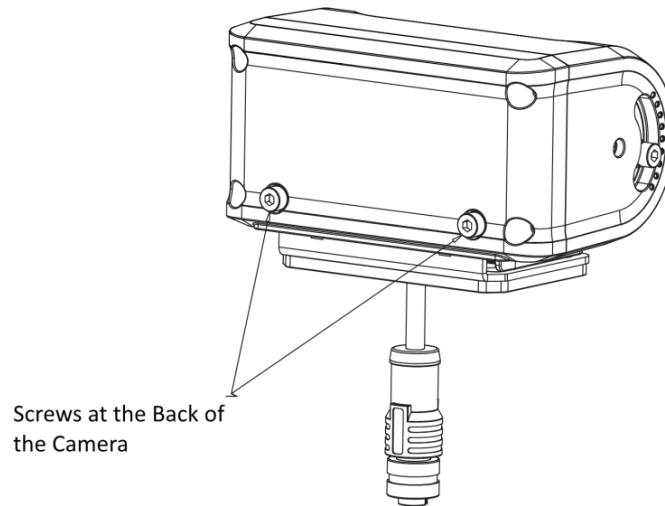


Figure 2-7 Unfasten the Screws

Step 2 Take off the sheet metal from the camera, and the rubber seal of the cable from the sheet metal.

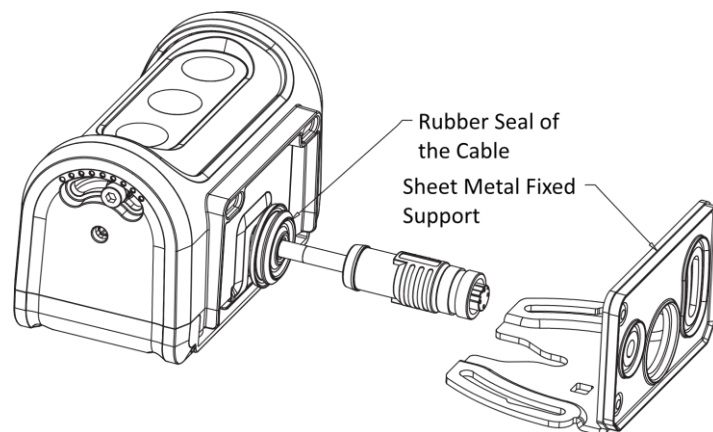


Figure 2-8 Take Off the Sheet Metal and Rubber Seal

Step 3 Vertically place the sheet metal fixed support on the place where the camera is to be installed, but do not tighten the screw to the end.

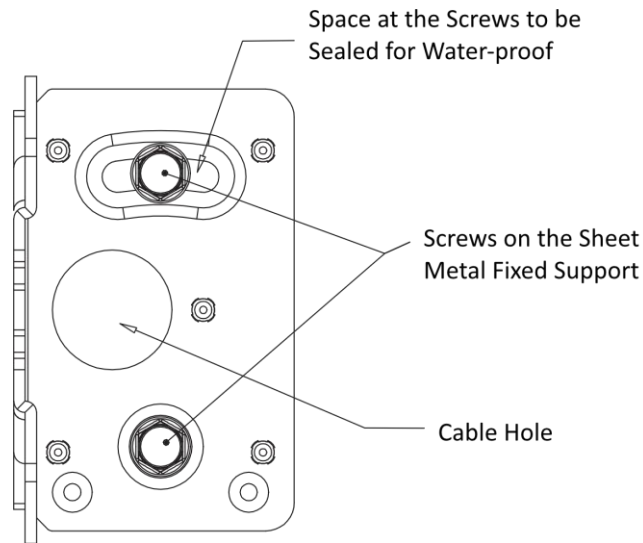


Figure 2-9 Fix the Sheet Metal Fixed Support

Step 4 Guide the cable through the cable hole, seal the hole with the rubber seal.

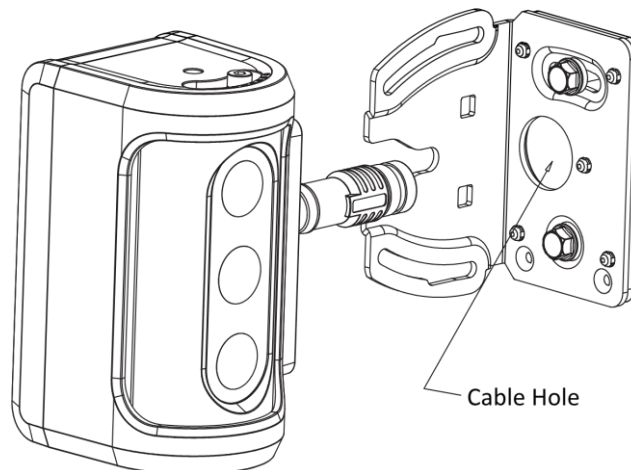


Figure 2-10 Reinstall the Camera to the Fixed Support

Step 5 Install the camera back to the sheet metal fixed support, adjust and record the angle of the camera for best vision. For details, see Chapter 3 Angle Adjustment.

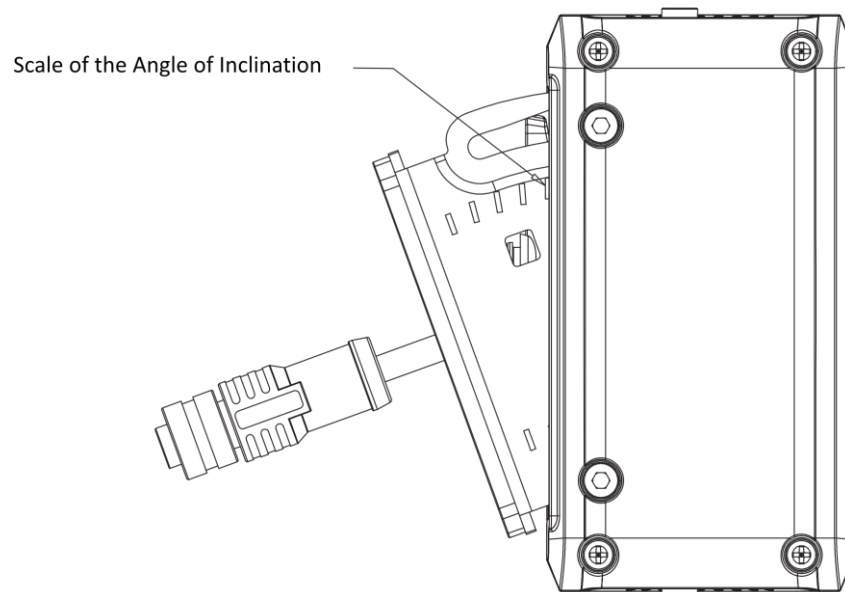


Figure 2-11 Adjust the Angle of the Camera

Step 6 Tighten the two screw on the back of the camera.

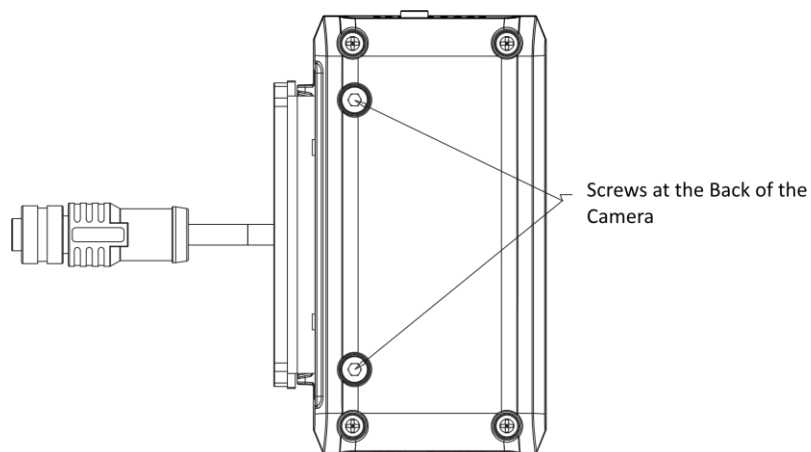


Figure 2-12 Tighten the Screws

Step 7 Again guide the cable through the cable hole, seal the hole with the rubber seal.

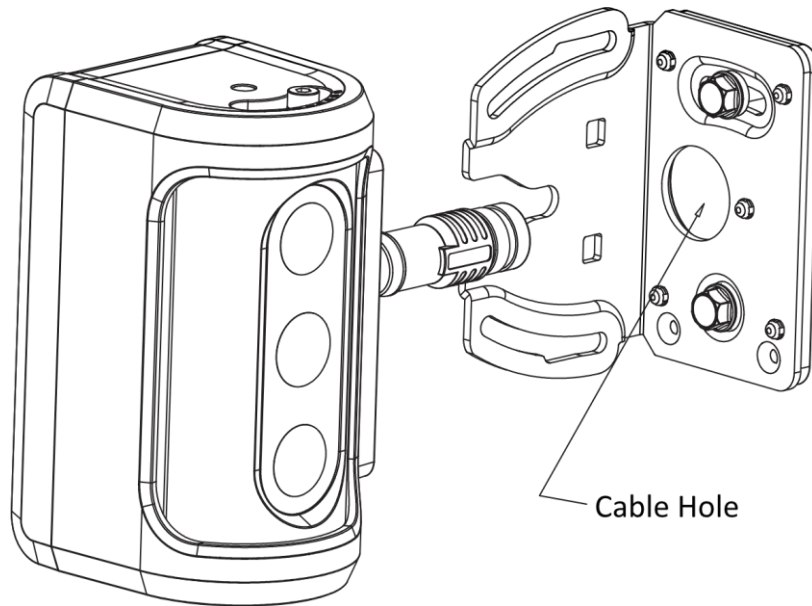


Figure 2-13 Organize the Cable

Step 8 Re-install the camera back to the sheet metal fixed support, adjust the angle of inclination of the camera to the angle recorded, and tighten the two fixation screw to avoid wobble.

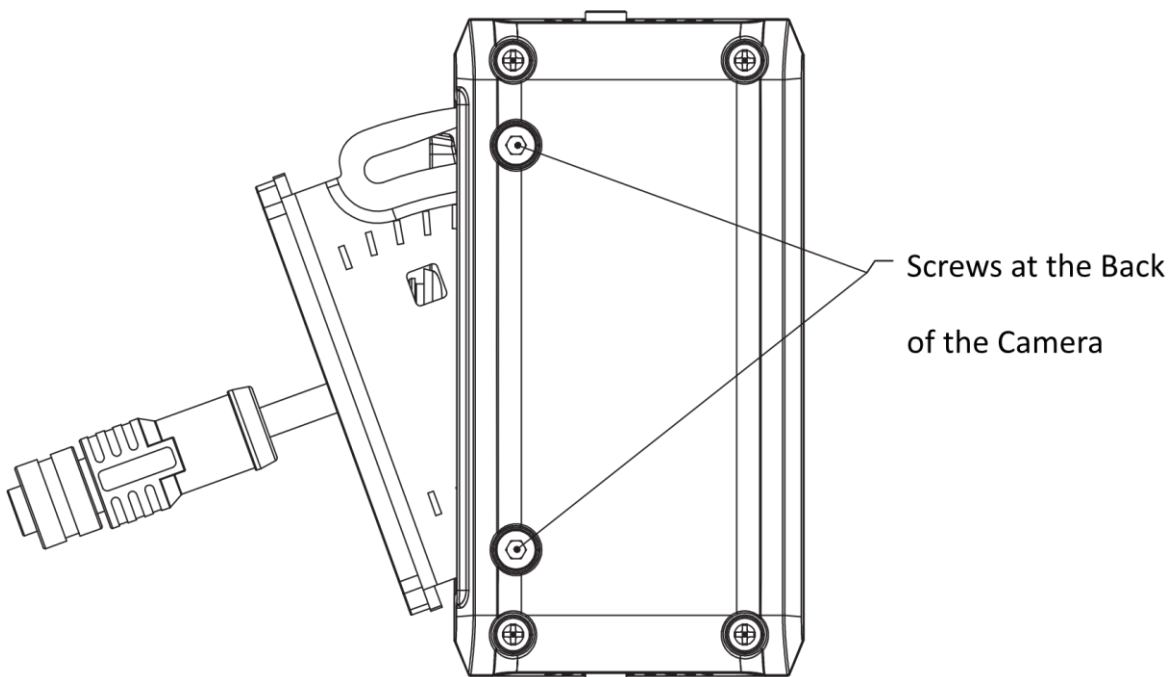


Figure 2-14 Reinstall the Camera

2.3 Horizontal Installation

Step 1 Use the hexagon wrench in the package to unfasten the two the screws at the back of the camera.

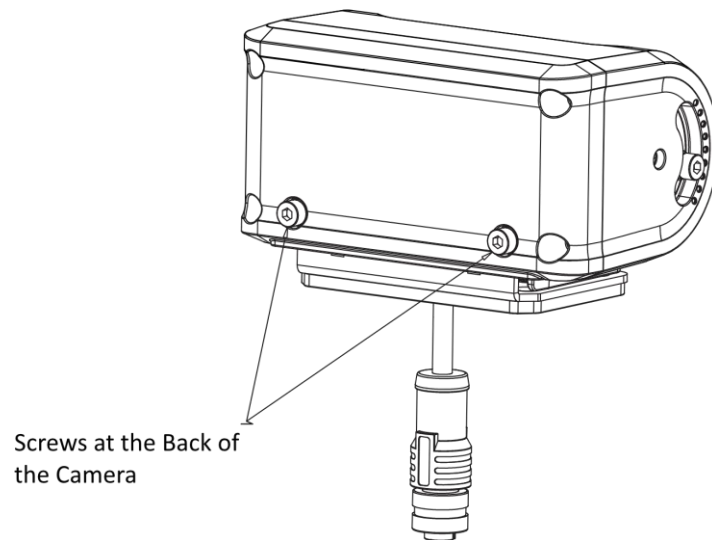


Figure 2-15 Unfasten the Screws

Step 2 Take off the sheet metal from the camera, and the rubber seal of the cable from the sheet metal.


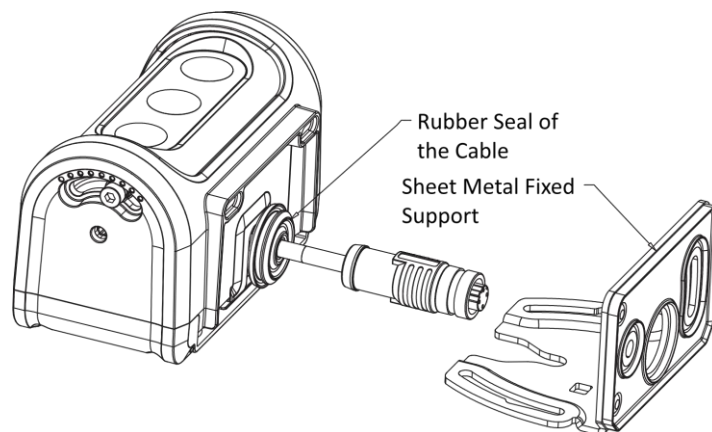


Figure 2-16 Take Off the Sheet Metal and Rubber Seal

Step 3 Horizontally place the metal sheet on the position of installation and then fasten the screws.

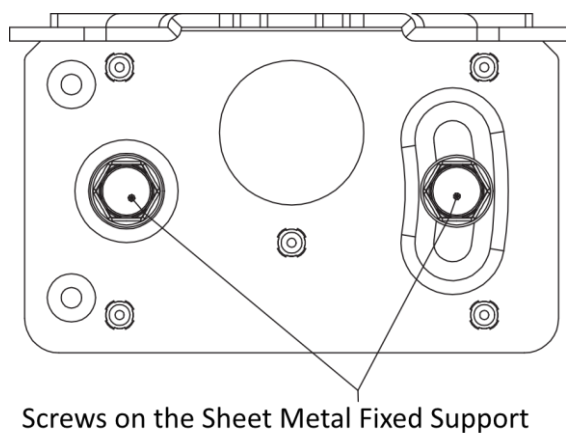

Step 4 Guide the cable through the cable hole, seal the hole with the rubber seal, and install the camera back to the sheet metal fixed support.

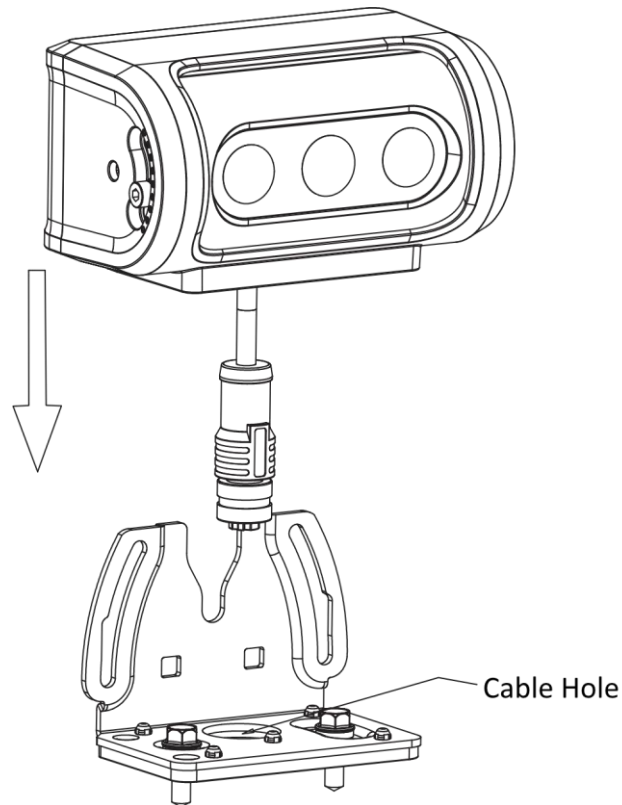


Figure 2-17 Install the Camera to the Fixed Support

Step 5 Tighten the two screw on the back of the camera.

Screws at the Back of the Camera

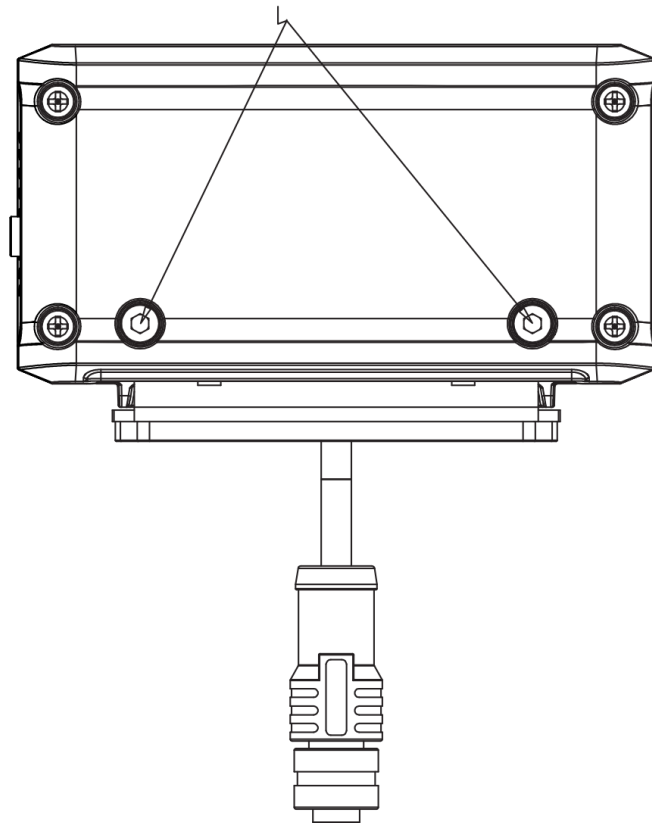


Figure 2-18 Tighten the Screws

Step 6 Loosen the screw on the two sides of the camera, adjust the angle of the camera for the best vision, and tighten the two fixation screws to avoid wobble.

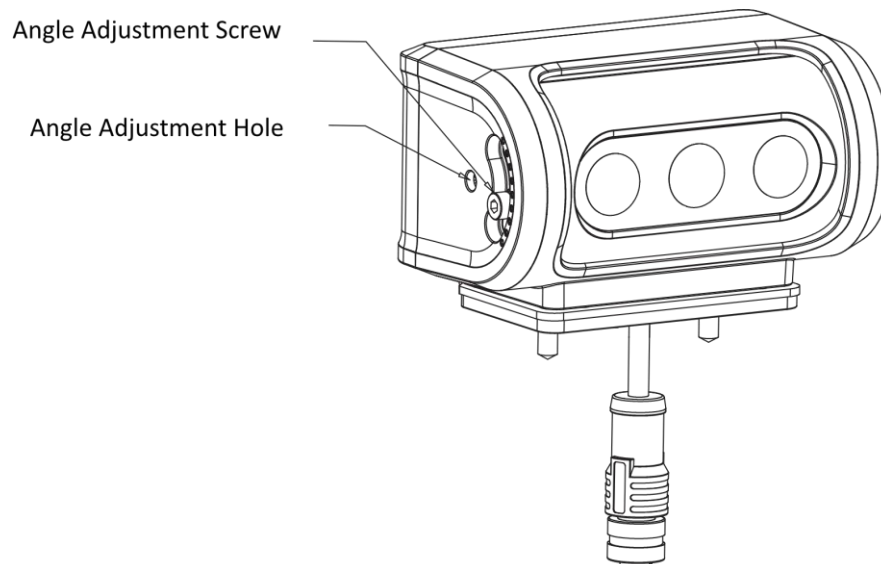


Figure 2-19 Adjust the Angle of the Camera

Chapter 3 Angle Adjustment

3.1 Adjust With Wrench

The angle of the camera can be adjusted in 2 ways: adjust with the wrench and adjust the angle that it is installed on the surface of the vehicle. If the installation surface is vertical to the ground, then no need for adjusting the body of the camera.

Step 1 Loose the screw on the two sides of the camera with the hexagon wrench.

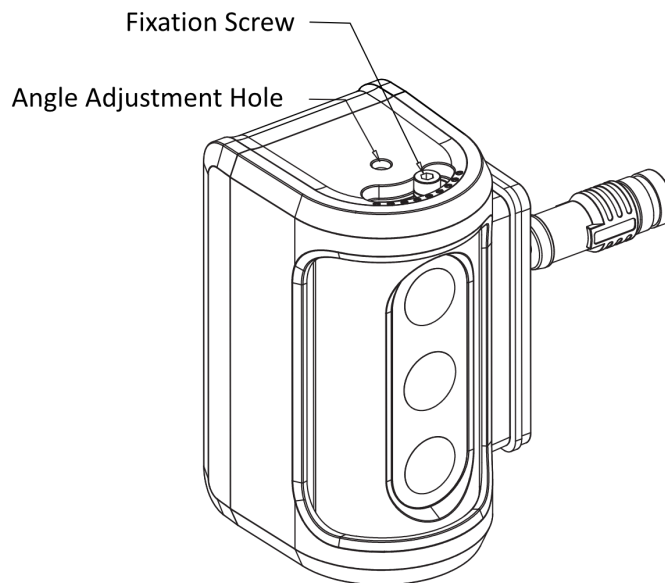


Figure 3-1 Adjust the Angle With the Wrench

Step 2 Adjust the angle of the camera for the best vision. The range is 80° and the scales differ by 10° . After the adjustment, tighten the two fixation screw to avoid wobble.

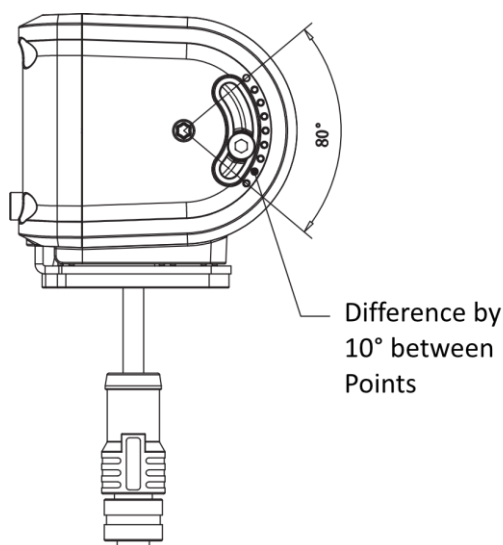


Figure 3-2 Range And Scale

3.2 Adjust the Body of the Camera

When installed on a tilted surface, loosen the two screws at the back of the camera and adjust the body of the camera before adjusting the camera itself.

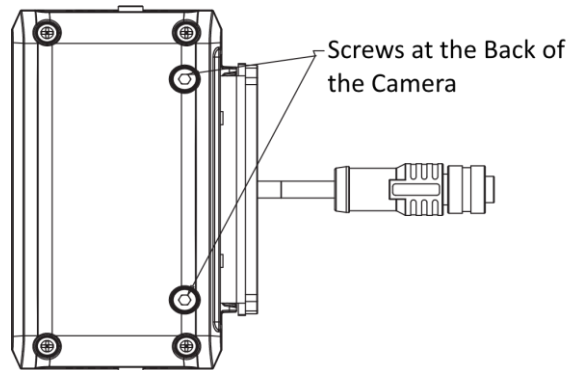


Figure 3-3 Loosen the Screws

The metal sheet can be opened up to 30° and both sides are supported.

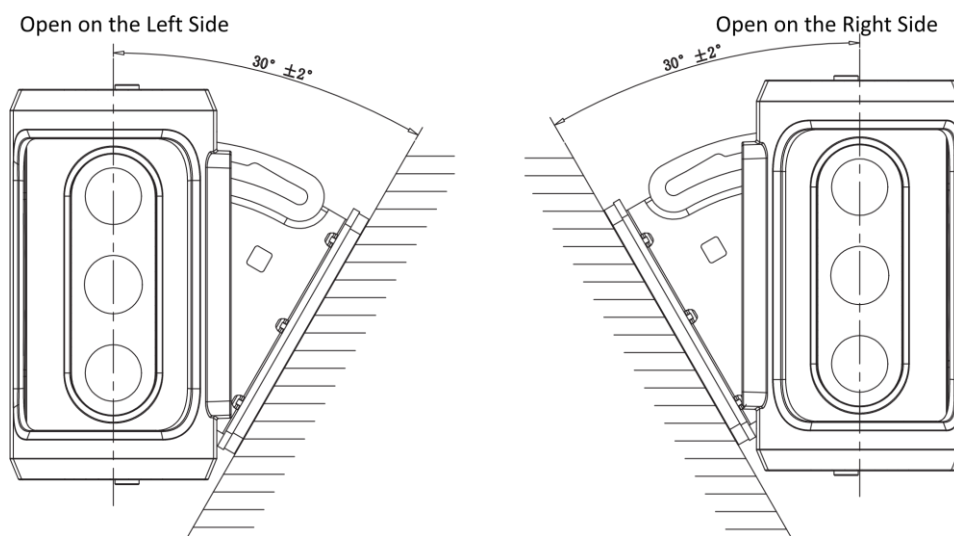


Figure 3-4 Range of the Inclination Angle

Adjust the vertical vision by the moving the camera around the screw in the metal sheet.


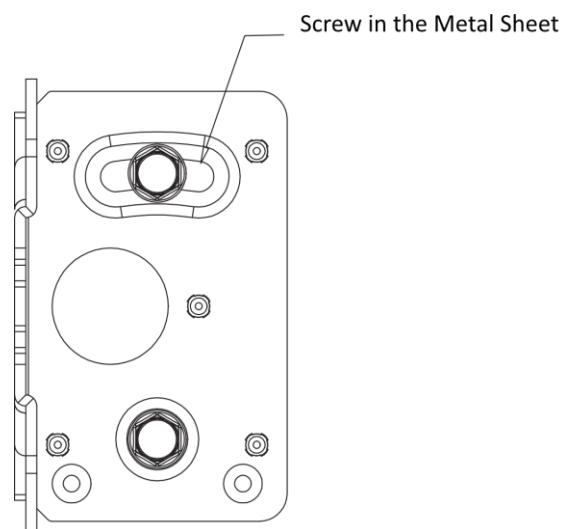


Figure 3-5 Adjust the Vertical Vision



See Far, Go Further